

**These colors are for lights fitted with Tefzel® High Temp wire**


**Important Notes:**

This new generation Nav/Strobe is equipped with A 'Built In' synchroniser.

Each set of lights will have one light with a YELLOW wire and one light with a BLUE wire

The BLUE wire is the synchronising OUTPUT and more than 2 lights can be synchronised from it.

The BLUE and YELLOW wires are connected Together. Do NOT connect them to any other wires

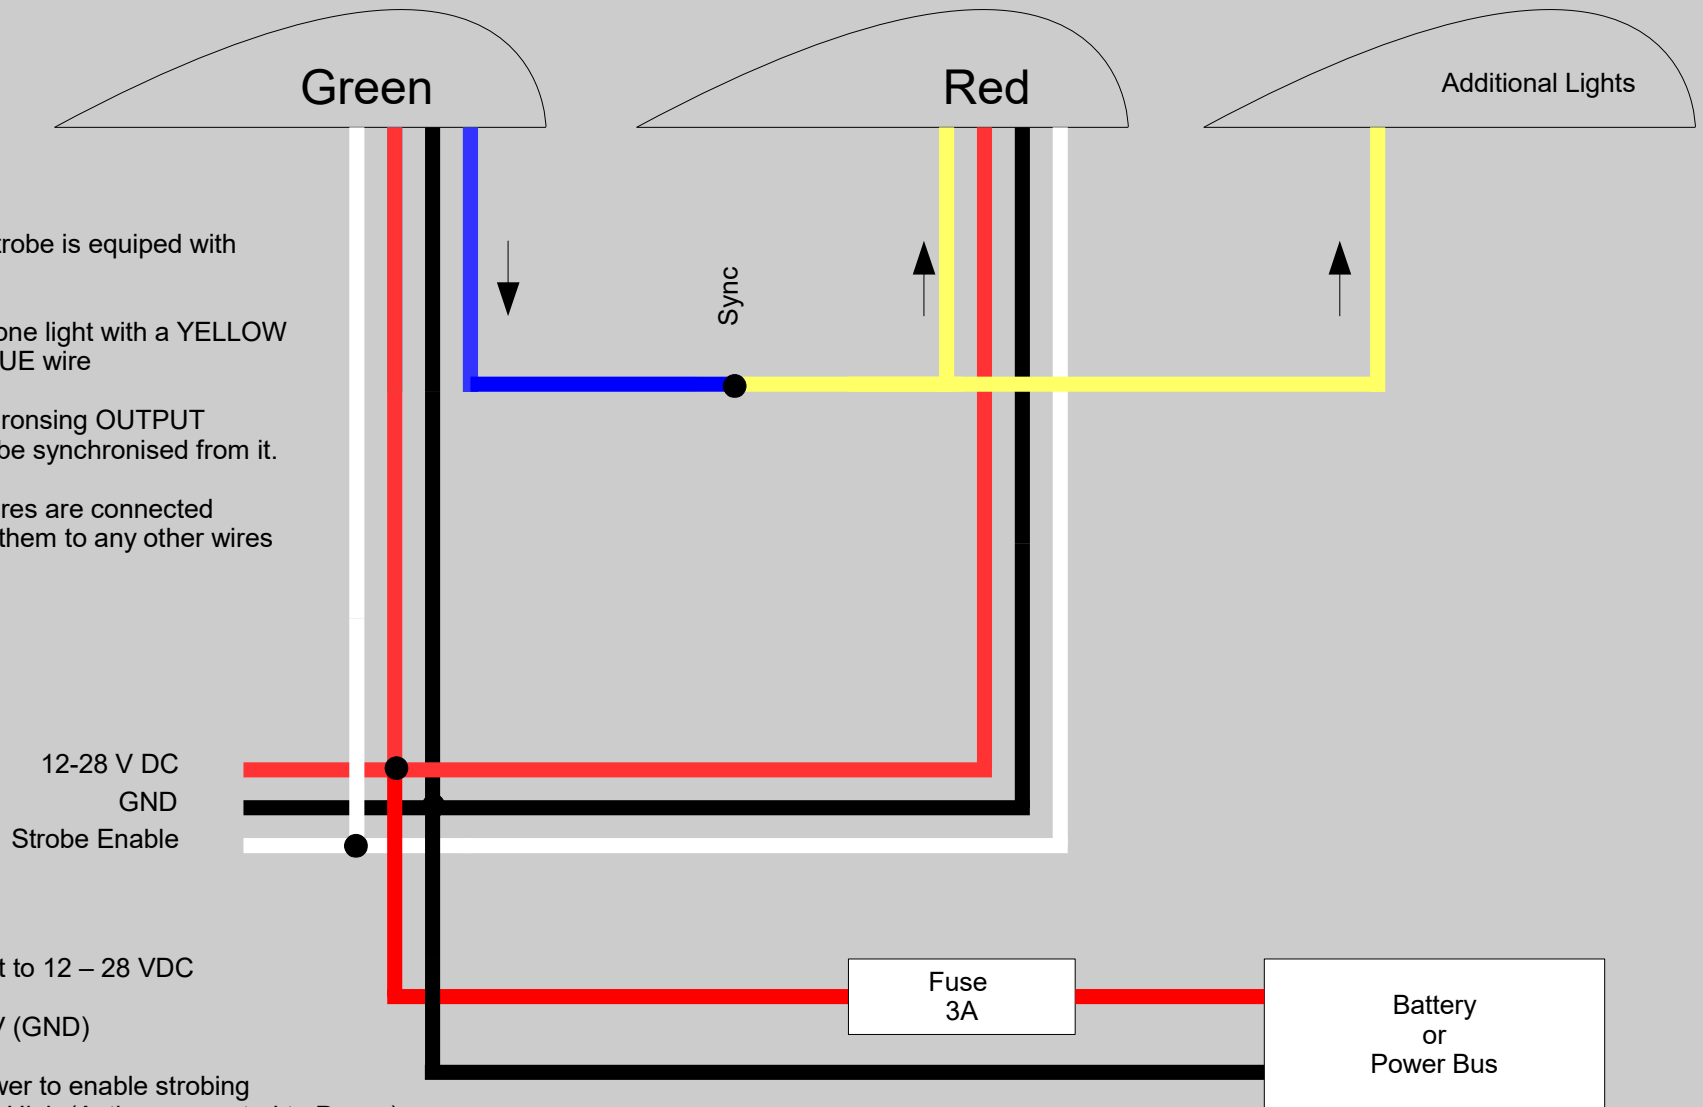


**Connection Instructions:**

1. RED - (Power) Connect to 12 – 28 VDC
2. BLACK - Connect to 0V (GND)
3. Connect WHITE to Power to enable strobing  
Strobe Enable is Active High (Active connected to Power)
4. Connect BLUE to YELLOW for synchronised flashing  
Leave unconnected for individual flashing  
DO NOT connect YELLOW or BLUE to ANY other wires

Nav/Strobe wiring with switches.

BLUE/YELLOW connected for synchronous flashing.

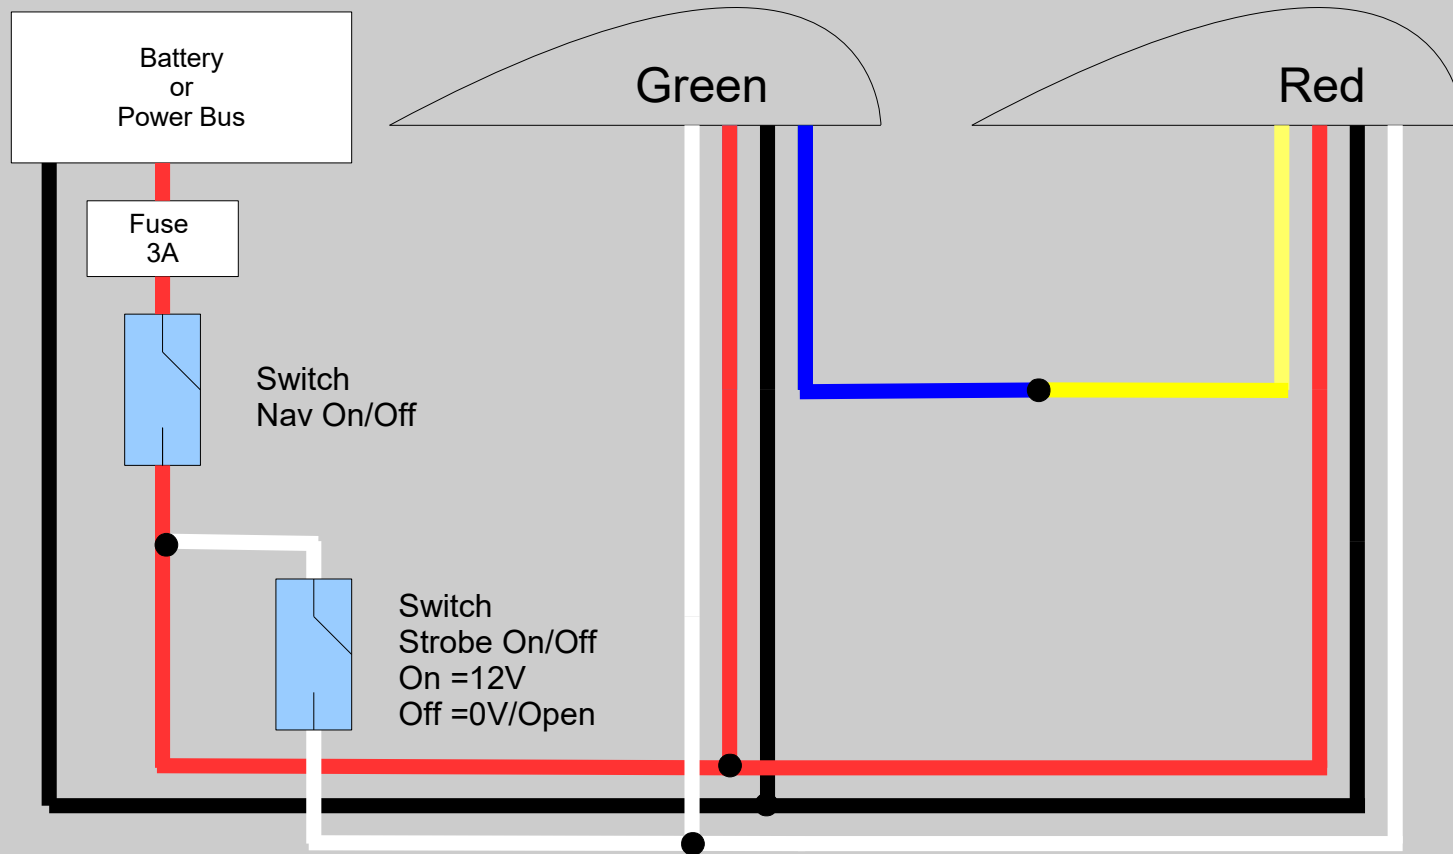

Nav/Strobe wiring with switches.

BLUE/YELLOW not connected – no synchronous flashing

