


CN34 – LED Navigation / Obstruction Light

Application

Widely used for airports, Helipads, masts, wind turbines, bridges and high rise buildings

Key Feature

1. Anti-UV and high efficiency transmission up to 90%
2. ABS+PC alloy base, resistance to corrosion
3. Energy efficient, long lifespan
4. Fresnel lense optical design
5. Low power consumption with high efficiency
6. Controls automatic light intensity levels
7. Surge protected
8. IP65

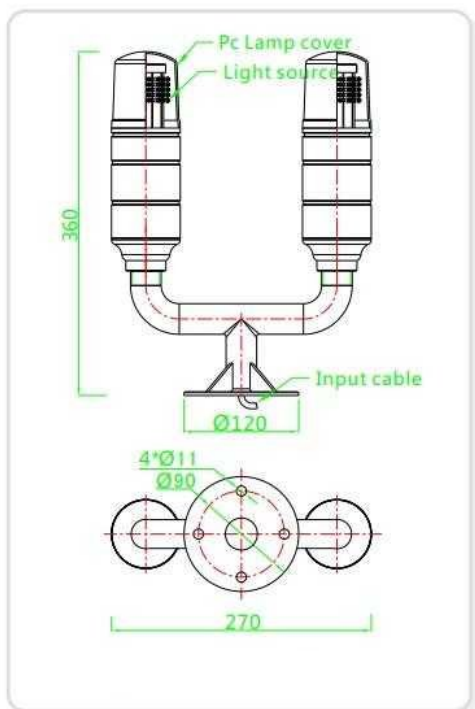

Item	Parameter
Model	CK-11LS
Operating voltage	AC110 V -220V (Other available)
Power consumption	≤5W
Flashing frequency	Steady burning
Light source	Red LED
Peak light intensity	≥32.5cd
Emitting color	Red
Beam angle	360° horizontal beam angle ≥10° vertical beam spread
Method of synchronization	NA (could choose the controller)
Overall size(mm)	270mm×360mm
Installation size(mm)	Φ90mm4*M10
Ingress protection	Ip65
Lightning protection level	10KA
Light controlled sensitivity	100Lux
Operating temperature	-40°C ~ 55°C
Net weight	3kg
Wind load	80m/sec.